

ICE o-Matic®

ICE 0606 Series Cube ICE Maker

- ✓ Produces up to 727 lbs. (330 Kgs.)* of ICE per day
- ✓ Constructed from sturdy, corrosion-resistant 300 series stainless steel
- ✓ Ultra-low profile - 20 inches (508 mm) tall
- ✓ Available with an air-, water- or remote-cooled condenser



ICE 0606 on a B55 Bin

**ICE-O-Matic® is the Best ICE Making Solution for:
Hard Water, Food Safety and Tight Spaces**

Problem

Solution

Food Safety

Food safety concerns about slime- and odor-causing bacteria

PURE ICE™ - Exclusively by ICE-O-Matic®

Built-in antimicrobial protection for the life of the machine prevents bacteria and slime fungus growth. ICE-O-Matic's® optional water filtration system provides protection against unpleasant tastes, odors and scale formation.

Hard Water

Scaling due to hard water slows Ice production

Harvest Assist

Consistent ICE production 24/7 by pushing the ICE into the bin rather than waiting for gravity to overpower the scale

Tight-Fitting Spaces

Inadequate air flow due to tight-fitting spaces reduces Ice production

Top Air Discharge

Maximum ICE production in a minimum amount of space with an ultra-low profile - no side clearance required

Corrosion


Salt air corrosion of outdoor equipment located in coastal regions

Sea Salt Corrosion Protection

All remote condensers are coated with a salt air corrosion protection – FREE

*Rated at 70 ° (21°) Air/50° (10°) Water

ICE 0606 Series Cube ICE Maker

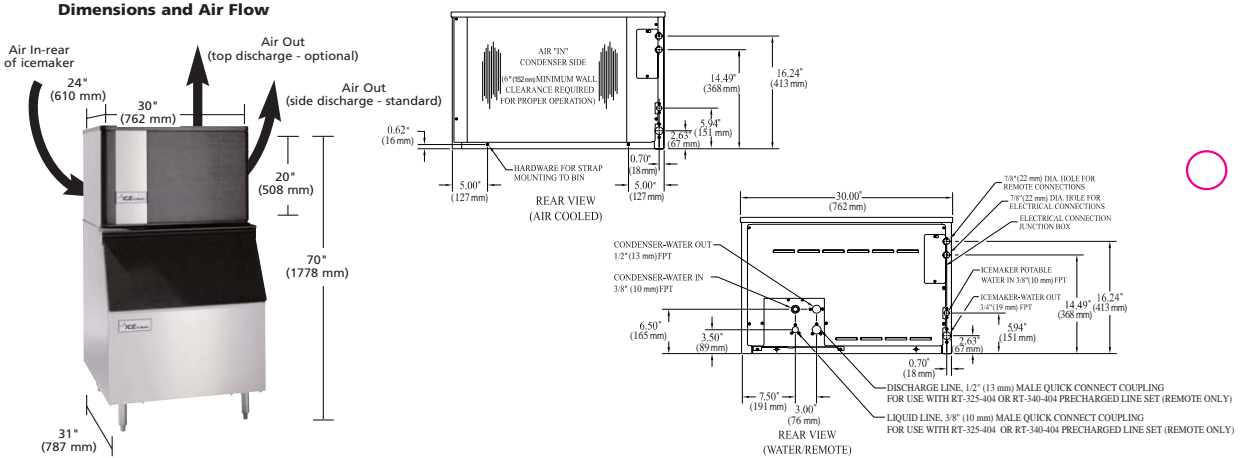


ICE PRODUCTION CHART POUNDS (KILOGRAMS) PER 24 HOURS

Conds. Unit	Air Temp. °F (°C)	ICE 0606			Air Temp. °F (°C)	ICE 0605		
		Water Temp. °F (°C) 80°(27°)	70°(21°)	50°(10°)		Water Temp. °F (°C) 80°(27°)	70°(21°)	50°(10°)
Air Cooled	90° (32°)	488 (222)	525 (239)	597 (272)	90° (32°)	433 (197)	466 (212)	528 (240)
	80° (27°)	551 (250)	592 (269)	652 (296)	80° (27°)	486 (221)	523 (238)	575 (261)
	70° (21°)	597 (271)	642 (292)	706 (321)	70° (21°)	526 (239)	565 (257)	622 (283)
Water Cooled	90° (32°)	549 (249)	590 (268)	613 (279)	90° (32°)	437 (199)	470 (214)	504 (229)
	80° (27°)	532 (242)	573 (260)	630 (286)	80° (27°)	448 (203)	481 (219)	530 (241)
	70° (21°)	547 (249)	588 (267)	647 (294)	70° (21°)	469 (213)	504 (229)	555 (252)
Remote Cooled	90° (32°)	506 (230)	544 (247)	617 (281)	90° (32°)	395 (180)	425 (193)	485 (221)
	80° (27°)	568 (258)	611 (278)	672 (306)	80° (27°)	449 (204)	482 (219)	531 (241)
	70° (21°)	615 (279)	661 (300)	727 (330)	70° (21°)	487 (221)	524 (238)	576 (262)
	50° (10°)			742 (337)	50° (10°)			588 (267)
	30° (-1°)			756 (344)	30° (-1°)			599 (272)
	0° (-18°)			771 (351)	0° (-18°)			611 (278)

OPERATING LIMITS

Ambient Temp. Range	50° - 110°F (10° - 43°C)
Air & Water Remote	-20° - 110°F (-29° - 43°C)
Water Temp. Range	40° - 100°F (4.5° - 38°C)
Water Pressure Ice Maker	Min. 20 psi (1.4 bar)
Water in	Max. 60 psi (6.9 bar)
Condenser Inlet Water (Water cooled only)	Min. 20 psi (1.4 bar) Max. 60 psi (6.9 bar)

1. 90°/70° figures are rated in accordance with ARI Standard 810. All remaining points are mathematical estimates.
2. All specifications and performance data are subject to normal manufacturing variances.



ORDERING AND SPECIFICATION INFORMATION

Model No.	Cond. Unit	Ice Production per 24 hrs. at 70° Air/50° Water lbs. (Kgs.)	Ice Production per 24 hrs. at 90° Air/70° Water lbs. (Kgs.)	Water Used-Gals. (Lits.) per 100 lbs. of Ice 90° Air/70° Water		Kilowatts Used per 100 lbs. of Ice 90° Air/70° Water	Btuh	Voltage Characteristics	No. of Wires	Min. Circuit Amp.	Max. Fuse Size	Shipping Weight lbs. (Kgs.)	
				Ice Prod. Use	Cond. Use								
60 Hz	ICE0606•A	Air	706 (321)	525 (239)	23.5 (89)	n/a	6.5	11538	208-230/60/1	3	12	15	175 (80)
	ICE0606•VW	Water	647 (294)	590 (268)	27.4 (104)	196.9 (745)	5.1	11473	208-230/60/1	3	9.5	15	170 (77)
	ICE0606•R	Remote	727 (330)	544 (247)	21.6 (82)	n/a	6.8	12269	208-230/60/1	3	13.0	15	170 (77)
50 Hz	ICE0605•A	Air	622 (283)	466 (212)	21.9 (83)	n/a	6.5	10284	230/50/1	3	8.8	15	175 (80)
	ICE0605•VW	Water	555 (252)	470 (214)	27.2 (103)	126.1 (477)	6.0	9909	230/50/1	3	6.8	15	175 (80)
	ICE0605•R	Remote	576 (262)	425 (193)	25.1 (95)	n/a	8.2	10708	230/50/1	3	9.9	15	170 (77)
ERC-1062	Remote Condenser for 1 or 2 model ICE0600R (208-230/50-60/1 voltage)											95 (43)	
RT-325-404	25 ft. (7.6m) Precharged Tubing Kit for R-404A models											13 (6)	
RT-340-404	40 ft. (12m) Precharged Tubing Kit for R-404A models											18 (8)	
RT-345-404	45 ft. (13.7m) Precharged Tubing Kit for R-404A models											19 (9)	
RT-360-404	60 ft. (18.2m) Precharged Tubing Kit for R-404A models											26 (12)	

See Bin specification sheet for information on ice storage bins

- represents cube size. For full cube substitute an "F", for half cube substitute an "H".
- Top discharge is available on ICE0606 air-cooled model, just substitute a "T" for the "A" in the model number.
- Please note: air-cooled units require 6" (152 mm) clearance for air intake and exhaust.



We reserve the right to make changes in design and construction at any time without obligation.
2003 ©ICE-O-Matic Rev Code: 10088-07/03-55



ICE-O-Matic 11100 E. 45th Avenue, Denver, CO 80239
Tel. 303 371-3737 Fax. 303 371-6296 www.iceomatic.com